




20kW Natural Gas On-Site Power Industrial Generator

Model	Standby Rating	
MQP20GM	60 Hz	20 kW (25 kVA)
	1800 RPM	

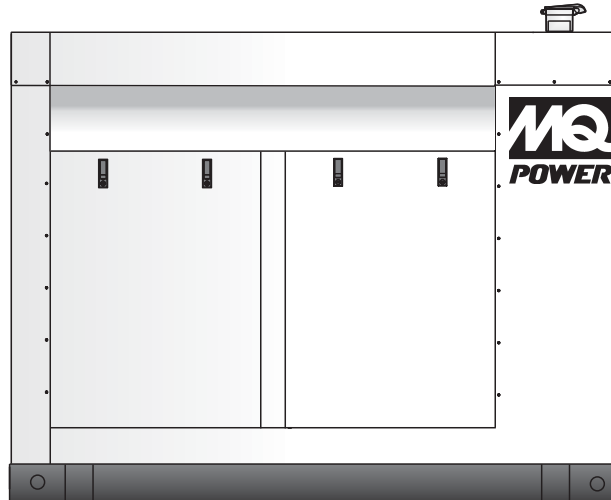

Standard Features

Heavy Duty Engine

- Natural gas or liquid propane, naturally aspirated, 4 -cycle, water cooled.
- Electronic speed control governor.

Alternator

- Brushless, 4-pole, synchronous, 12 lead design.
- Class H insulation system conforms to NEMA MG1-22, BS5000, CSA-C22-2, IEC-34-1 standards for temperature rise.
- Sustained short-circuit capability allowing downstream coordination breakers to trip without collapsing the generator field.
- Drip-proof, self-venting, amortisseur windings.
- Epoxy impregnated windings with tropical insulation for increased environmental protection and long life.
- Exceptional waveshape and voltage balance; 2/3 pitch winding to minimize harmonic distortion.

Electronic Voltage Regulator

- Encapsulated electronic voltage regulator precisely regulates the current into the exciter field.
- Voltage regulation of $\pm 1.0\%$ no load to full load.

Full Load Acceptance

- Accepts 100% of standby nameplate rating in one step, in compliance with NFPA, para 5-13.2.6.

Cooling System

- Closed circuit, pressurized system with ambient temperature rating of 40°C (113°F).

Generator Control Panel

- MEC 310™ microprocessor-based, digital control panel; vibration isolated and NFPA 110 compliant.
- Liquid crystal display screen with alpha-numeric readout for display and programming.
- Self-diagnostic feature continuously verifies processing, memory circuits and input/output.

Skid and Housing

- Generator available as open skid-mount or outdoor housing design.
- Optional weather-protective or sound-attenuated housings.
- Integral vibration isolators.
- Steel battery rack and battery cables.

Warranty

- Engine-generator sets are covered by an express written 2-year/ 2000 hour (whichever occurs first) limited warranty.

Agency Approval

- UL 2200 certification.

PRELIMINARY COPY



20kW Natural Gas On-Site Power Industrial Generator

Alternator Specifications	Standard 3-Phase Generator	Optional Full Output 1-Phase Generator
Manufacturer/Model	Marathon MagnaPlus 282PSL1705	Marathon MagnaPlus 282PSL1716
Type	4-Pole, Rotating Field	4-Pole, Rotating Field
Exciter Type	Brushless, Shunt Excitation Design	Brushless, Shunt Excitation Design
Number of Leads	12 Lead, Broad Range, Reconnectable	4 Lead, Broad Range, Reconnectable
Voltage Regulator	SE350, Solid State, Volts-per-Hertz	SE350, Solid State, Volts-per-Hertz
Insulation	NEMA MG1-1.66	NEMA MG1-1.66
Material	Class H	Class H
Temperature Rise	125°C, Standby Rating	125°C, Standby Rating
Bearing, Type	Single, Sealed	Single, Sealed
Coupling	Flexible Disk Type	Flexible Disk Type
Cooling Air Volume	250 cfm	250 cfm
Amortisseur Windings	Full	Full
Voltage Regulation (no load to full load)	±1%	±1%
Single Step Load Acceptance per NFPA 110	100% of Rating	100% of Rating

Engine Specifications

Manufacturer/Model	General Motors/Vortec™ 3000
Type	4-cycle, water cooled
Cylinder Arrangement	4 In-line
Displacement	147 in ³ (2.4 L)
Bore	3.66 in. (93 mm)
Stroke	3.93 in. (100 mm)
Compression Ratio	9.6 : 1
Cylinder Block	Cast Iron
Cylinder Head	Cast iron
Crankshaft	Nodular cast iron
Brake Mean Effective Pressure (BMEP)	139 psi (958 kPa)
Rated RPM	1800 RPM
Max. Power @ Rated RPM	33 hp (20 kW)
Governor Type	Electrical
Frequency Regulation: no load to full load	8% under varying loads from no load to 100% rated load.
Frequency Regulation: Steady State	±0.5% of mean value for constant loads from no load to full load.
Air Cleaner Type	Dry

Rating Guidelines

STANDBY POWER: Rating corresponds to ISO Standard Fuel Stop Power. It is applicable for supplying standby electrical power at variable load in areas with well established electrical networks in the event of normal utility power failure. No overload capability is available for this rating.

SINGLE PHASE OUTPUT: Broad range alternators can supply single phase output up to 2/3 set rated 3-phase kW at 1.0 P.F. Refer to Amperage chart.

Amperage

Voltage	Phase	Wire	Amperage
120/208 Volt	3	4	69
120/240 Volt	3	4	60
277/480 Volt	3	4	30
120/240 Volt Full Output	1	3	83

Lubrication System

Type	Rotor on Crank
Oil Capacity-With Filter	1.4 gal (5.1 L)
Oil Filter	Full Flow, bypass if plugged
Oil Pressure At Rated Speed	16 psi (110 kPa)
Maximum Oil Temperature	260°F (127°C)

Engine Electrical System

Battery Charging Alternator - Make	Remy
Ground Type	Negative
Volts (DC)	12 VDC
Ampere Rating	70 A
Starter Motor Make/Model	GM/Delco
Starter Motor Rated Voltage	12 VDC
Starter Motor Battery Capacity	



20kW Natural Gas On-Site Power Industrial Generator

Cooling System

Exhaust Manifold Type	Dry
Radiator Design	Standard horizontal discharge
Ambient Temperature Rating	
Coolant Capacity	
Water Pump Design/Type	Belt driven, Centrifugal Vane
Coolant Flow	6.1 gal/min (23.0 L/min)
Radiator Cooling Air	
Heat Rejection From Engine	960 Btu/min (16.8 kW)
Heat Rejection To Coolant	1115 Btu/min (19.6 kW)
Fan Diameter	
Fan Horsepower	3.4 hp (2.5 kW)
High Water Temperature Indication	230°F (110°C)

Fuel System


Fuel Type	Pipeline Natural Gas	Liquid Propane
Fuel Supply Line Inlet	1/2" pipe, 3/4" hose	1/4" NPT 3/8 hose
Fuel Supply Pressure	4-6 in/H ² O	250 psi
Fuel Consumption at % of Rated Load		
100%	416 cf/hr	3.06 g/hr
75%	312 cf/hr	2.29 g/hr
50%	208 cf/hr	1.53 g/hr
25%	104 cf/hr	0.77 g/hr

Exhaust System

Exhaust Flow at Rated kW	172 cfm (4.9 m ³ /min)
Exhaust Temperature at Rated kW	1292°F (700°C)
Maximum Allowable Backpressure	50 in/H ² O (12.5 kPa)
Heat Rejection To Exhaust	2210 Btu/min (38.6 kW)

Derating Factors

	Altitude
The engine may be operated up to 1000 ft. without derating. For operation at higher altitudes the power should be derated according to the following factors:	3.3% per 1000 ft.

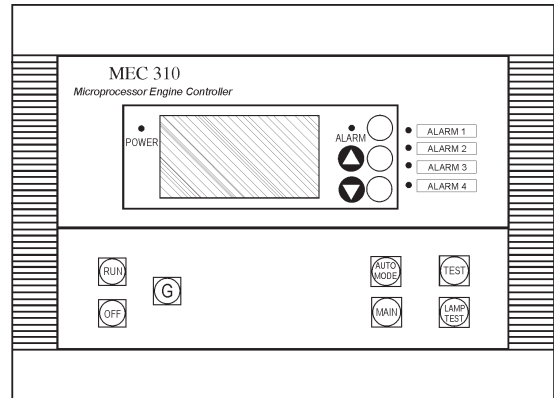

GENERATOR CONTROLLER

- MEC 310™ microprocessor-based digital generator controller.
- Meets all NFPA 110 requirements for emergency power systems Level I installations.
- High visibility graphical display screen with alpha-numeric readout.
- Self diagnostic features continuously verify processing, input/output and memory circuits.
- Digital 3-phase Power Metering including kW, kVAR, kVA power factor, kWhr and kVARhr for generator supply.
- RS485 Remote communication port available with Modbus™.
- Certified to UL508 and CSA 22.2 #14 Industrial Control Equipment Standards.

Standard Controller Features

- | | |
|--|--|
| <p>AC Metering Display:</p> <ul style="list-style-type: none"> ■ Voltage/Amperage/Frequency ■ Generator Phase Voltage/Current ■ Generator Frequency <p>Engine Control & Monitoring:</p> <ul style="list-style-type: none"> ■ LCD Operator Interface Display ■ Auto Start Control <p>Engine Parameter Display:</p> <ul style="list-style-type: none"> ■ Switch Not In Auto ■ Low Fuel Level ■ Oil Pressure ■ Engine Temperature ■ Battery Voltage/Condition ■ RPM ■ Fuel Level <p>Digital Fault Alarm/Shutdown Display:</p> <ul style="list-style-type: none"> ■ Overvoltage ■ Emergency Stop ■ Loss Of Speed ■ Overcrank ■ Overspeed Alarm ■ Low Oil Pressure Alarm ■ High Engine Temperature ■ Low Coolant Level <p>Dedicated Output Contacts:</p> <ul style="list-style-type: none"> ■ 8A ■ Normally Open Crank ■ Fuel (Run) | <p>Configurable Set Points/Time Delays:</p> <ul style="list-style-type: none"> ■ Engine Start ■ Crank ■ Rest ■ Cool down ■ Oil bypass <p>Standard 30 Event Log:</p> <ul style="list-style-type: none"> ■ Time/Date Stamp Capability ■ Real Time Clock ■ Battery Backup <p>Protective Relaying:</p> <ul style="list-style-type: none"> ■ IEEE/ANSI (27/59) Over/under voltage ■ (81 o/u) Overunder frequency ■ Reverse Power ■ (51) Time-overcurrent Protection <p>Communication Interface Ports:</p> <ul style="list-style-type: none"> ■ CANbus communication port ■ RJ11 port for PC interface <p>Optional Features</p> <ul style="list-style-type: none"> ■ J1939 CANbus engine communications port ■ MODBUS™ - RS485 Remote Communication port ■ Automatic Mains Failure control ■ Expansion Alarm Remote Annunciator (EAP 300) ■ Service Setup Port (SSP 300) |
|--|--|

PRELIMINARY COPY



20kW Natural Gas On-Site Power Industrial Generator

Generator Set Options

Alternator

- Full output 1 Phase Alternator
- Generator Strip Heater
- Permanent Magnet Generator (PMG)

Control Panel

- Remote Monitoring and Generator Network Communications Link
- Voltage Adjusting Rheostat

Cooling System

- Coolant Heater
- Radiator Duct Flange

Engine

- Engine Crankcase Ventilation Filter

Enclosed Unit

- Outdoor Weather-protective Housing
- Outdoor Sound-Attenuated Housing
- Critical Grade Exhaust Silencer
- Exhaust Mounting Package
- Rain Cap

Open Unit

- Critical Exhaust Silencer
- Exhaust Mounting Package

Electrical System

- Battery
- Environmental Plastic Battery Box
- Battery Charger, Equalize/Float Type 3.5 Amperes
- Battery Charger w/Alarms, Equalize/Float Type, 10 Amperes

Fuel System

- LPG - Liquid Withdrawal
- LPG - Vapor Withdrawal

Automatic Transfer Switch

- Amperage _____
- No. Poles _____
- Type Enclosure _____
- Options _____

Miscellaneous

- Main Line Circuit Breaker
 - 120/208 Volt, 3 Phase, 3 Pole
 - 120/240 Volt, 3 Phase, Delta, 3 Pole
 - 139/240 Volt, 3 Phase, 3 Pole
 - 277/480 Volt, 3 Phase, 3 Pole
 - 120/240 Volt, 1 Phase, 2 Pole
- Main Line Circuit Breaker Options
 - Auxiliary Contacts
 - DC Shunt Trip
- Remote Annunciator Panel
- Remote Emergency Stop Kit
- Vibration Isolators, Spring Type



Weights and Dimensions

Housing Options	A	B	C
Open	84 in. (2,133 mm)	34 in. (863 mm)	43 in. (1,092 mm)
Weight	1,185 lbs (537.5 kg)		
Standard	84 in. (2,133 mm)	34 in. (863 mm)	66 in. (1,676 mm)
Weight	1,612 lbs (731 kg)		
Sound Attenuated	84 in. (2,133 mm)	34 in. (863 mm)	66 in. (1,676 mm)
Weight	1,665 lbs (755 kg)		

Weights are based on dry gensets with standard equipment. The total weight may vary according to fluid additions and/or optional equipment ordered with the unit.

Backfeed to a utility system can cause electrocution and/or property damage. Do not connect to any building's electrical system except through an approved device. Specifications are subject to change without notice.

Your MQ Power dealer is:

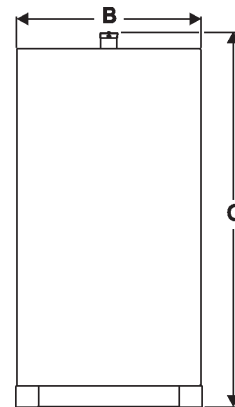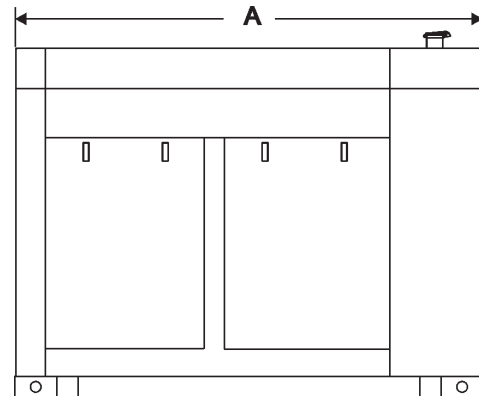

MQ POWER
 POST OFFICE BOX 6254
 CARSON, CA 90749
 310-537-3700 • 800-883-2551
 FAX: 310-632-2656
 E-MAIL: mqpower@multiquip.com
 WEBSITE: www.mqpower.com