

# MARATHON ELECTRIC MAGNAPLUS GENERATORS

Section 3600

Page 71

Basic Model 431PSL6206

Test Report No. WC1902

Date: 1-1-00

## TYPICAL SUBMITTAL DATA

kW (kVA)	1500 RPM			50 Hertz			12 Leads		
	3 Phase			0.8 Power Factor			Dripproof or Open Enclosure		
	Class B	Class F			Class H				
Voltage*	80° C ① Continuous	90° C ① Lloyds	95° C ① ABS	105° C British Standard	105° C ① Continuous	130° C ① Standby	125° C British Standard	125° C ① Continuous	150° C ① Standby
<b>220/440</b>	102 (128)	116 (145)	120 (150)	129 (161)	129 (161)	145 (181)	138 (173)	141 (176)	152 (190)
<b>208/415</b>	122 (153)	136 (170)	140 (175)	148 (185)	148 (185)	164 (205)	154 (193)	160 (200)	169 (211)
<b>200/400</b>	129 (161)	141 (176)	146 (183)	154 (193)	154 (193)	168 (210)	160 (200)	165 (206)	176 (220)
<b>190/380</b>	133 (166)	144 (180)	149 (186)	160 (200)	160 (200)	172 (215)	164 (205)	169 (211)	180 (225)
<b>173/346</b>	133 (166)	141 (176)	144 (180)	152 (190)	152 (190)	164 (205)	156 (195)	160 (200)	172 (215)

① Rise by resistance method, Mil-Std-705, Method 680.1b.

Rating per BS 5000.

Submittal Data: 208/415 Volts*, 200 kVA, 1500 RPM, 50 Hz, 3 Phase					
Mil-Std-705B			Mil-Std-705B		
Method	Description	Value	Method	Description	Value
301.1b	Insulation Resistance	> 1.5 Meg	505.3b	Overspeed	1875 RPM
302.1a	High Potential Test		507.1c	Phase Sequence CCW-ODE	ABC
	Main Stator	2000 Volts	508.1c	Voltage Balance, L-L or L-N	0.2%
	Main Rotor	1500 Volts	601.4a	L-L Harmonic Maximum - Total (Distortion Factor)	5.0%
	Exciter Stator	1500 Volts	601.4a	L-L Harmonic Maximum - Single	3.0%
	Exciter Rotor	1500 Volts	601.1c	Deviation Factor	5.0%
	PMG Stator	1500 Volts**	---	TIF (1960 Weightings)	<50
401.1a	Stator Resistance, Line to Line		625.1c	Mechanical Strength (High Wye Connection, Sustained 3 Phase Short Circuit Current) <sup>(3)</sup>	< 300%
	High Wye Connection	0.0371 Ohms	652.1a	Shaft Current	< 0.1 ma
	Rotor Resistance	0.679 Ohms	652.1a	Main Stator Capacitance to Ground	0.011 mfd
	Exciter Stator	18.5 Ohms			
	Exciter Rotor	0.116 Ohms			
	PMG Stator	2.1 Ohms**			
410.1a	No Load Exciter Field Amps at 480 Volts Line to Line	0.82 A DC			
420.1a	Short Circuit Ratio	0.66			
421.1a	Xd Synchronous Reactance	2.145 pu			
422.1a	X2 Negative Sequence Reactance	0.179 pu	--	Generator Frame	431
423.1a	X0 Zero Sequence Reactance	0.037 pu	--	Type	Ext. Voltage Regulated, Brushless
425.1a	X'd Transient Reactance	0.13 pu	--	Insulation	Class H
426.1a	X"d Subtransient Reactance	0.123 pu	--	Coupling - Single Bearing	Flexible
--	Xq Quadrature Synchronous Reactance	1.064 pu	--	Amortisseur Windings	Full
427.1a	T'd Transient Short Circuit Time Constant	0.049 sec.	--	Cooling Air Volume	1000 CFM
428.1a	T" d Subtransient Short Circuit Time Constant	0.013 sec.	--	Exciter	Rotating
430.1a	T'do Transient Open Circuit Time Constant	1.1 sec.	--	Voltage Regulator	SE350***
432.1a	Ta Short Circuit Time Constant of Armature Winding	0.019 sec.	--	Voltage Regulation	1%***
			--	Sensing	1 Phase***

<sup>(3)</sup> Excitation support system or PMG required to sustain short circuit currents.

\* Voltage refers to wye (star) connection, unless otherwise specified.

\*\*Not supplied as standard equipment.

\*\*\*DVR<sup>®</sup>2000 voltage regulator supplied with PMG option. DVR<sup>®</sup>2000 voltage regulation 1/4%, 1 or 3 Phase sensing.

# MARATHON ELECTRIC MAGNAPLUS GENERATORS

Section 3600





Page 72

Date: 1-1-00


Basic Model 431PSL6206

Test Report No. WC1902



## TYPICAL DYNAMIC CHARACTERISTICS 50 HERTZ

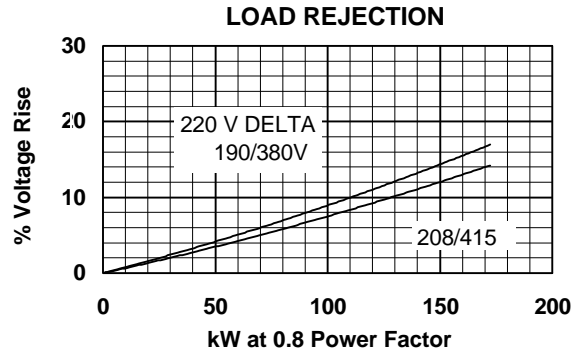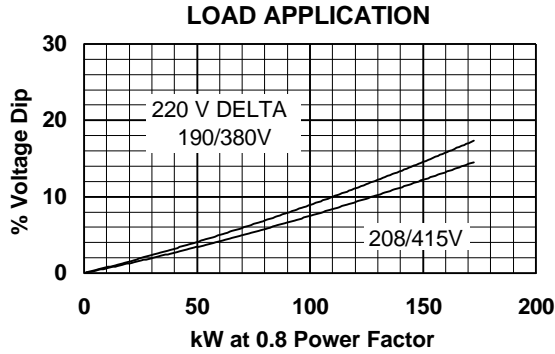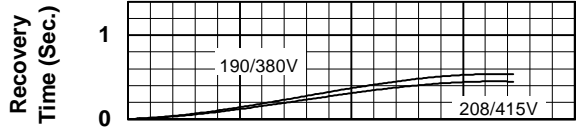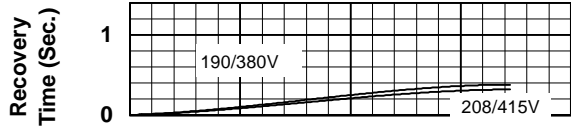

## TYPICAL MOTOR STARTING CHARACTERISTICS

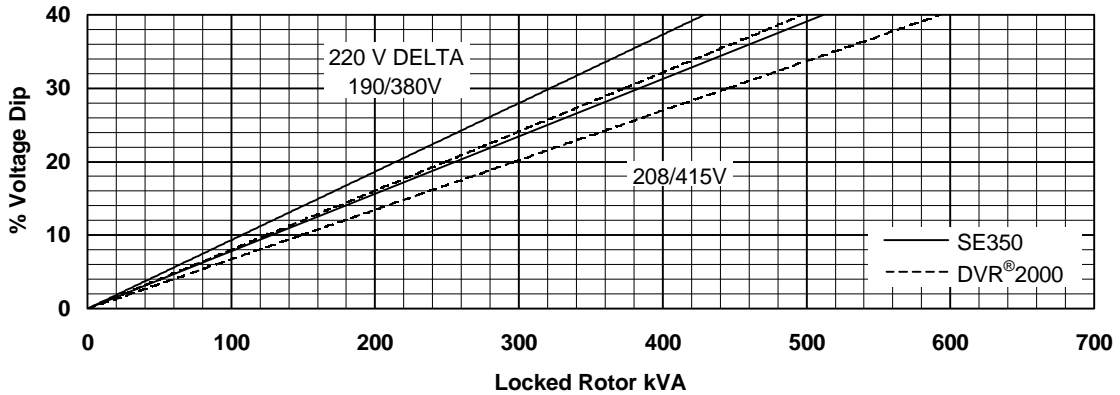

## TYPICAL GENERATOR EFFICIENCY

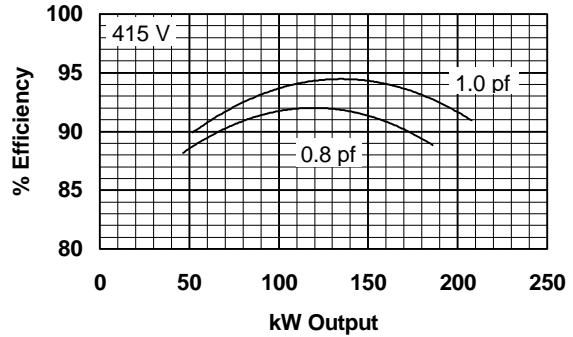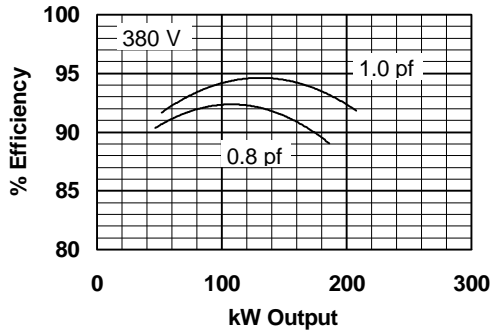

Voltage refers to wye (star) connection, unless otherwise specified.