

MARATHON ELECTRIC MAGNAPLUS GENERATORS

Section 3600

Page 75

Basic Model 431PSL6208

Test Report No. WC1903

Date: 1-1-00

TYPICAL SUBMITTAL DATA

kW (kVA)	1500 RPM			50 Hertz			12 Leads		
	3 Phase			0.8 Power Factor			Dripproof or Open Enclosure		
	Class B	Class F			Class H				
Voltage*	80° C ① Continuous	90° C ① Lloyds	95° C ① ABS	105° C British Standard	105° C ① Continuous	130° C ① Standby	125° C British Standard	125° C ① Continuous	150° C ① Standby
220/440	128 (160)	140 (175)	146 (183)	156 (195)	156 (195)	172 (215)	164 (205)	168 (210)	180 (225)
208/415	140 (175)	152 (190)	156 (195)	165 (206)	165 (206)	180 (225)	171 (214)	180 (225)	188 (235)
200/400	144 (180)	153 (191)	160 (200)	168 (210)	168 (210)	184 (230)	171 (214)	180 (225)	188 (235)
190/380	144 (180)	156 (195)	160 (200)	168 (210)	168 (210)	184 (230)	171 (214)	180 (225)	188 (235)
173/346	140 (175)	152 (190)	154 (193)	162 (203)	162 (203)	176 (220)	164 (205)	172 (215)	180 (225)

① Rise by resistance method, Mil-Std-705, Method 680.1b.

Rating per BS 5000.

Submittal Data: 208/415 Volts*, 225 kVA, 1500 RPM, 50 Hz, 3 Phase

Mil-Std-705B			Mil-Std-705B		
Method	Description	Value	Method	Description	Value
301.1b	Insulation Resistance	> 1.5 Meg	505.3b	Overspeed	1875 RPM
302.1a	High Potential Test		507.1c	Phase Sequence CCW-ODE	ABC
	Main Stator	2000 Volts	508.1c	Voltage Balance, L-L or L-N	0.2%
	Main Rotor	1500 Volts	601.4a	L-L Harmonic Maximum - Total (Distortion Factor)	5.0%
	Exciter Stator	1500 Volts	601.4a	L-L Harmonic Maximum - Single	3.0%
	Exciter Rotor	1500 Volts	601.1c	Deviation Factor	5.0%
	PMG Stator	1500 Volts**	--	TIF (1960 Weightings)	<50
401.1a	Stator Resistance, Line to Line High Wye Connection	0.0348 Ohms	625.1c	Sustained 3 Phase Short Circuit Current High Wye Connection (3)	901 Amps
	Rotor Resistance	0.709 Ohms	652.1a	Shaft Current	< 0.1 ma
	Exciter Stator	18.5 Ohms	652.1a	Main Stator Capacitance to Ground	0.014 mfd
	Exciter Rotor	0.116 Ohms			
	PMG Stator	2.1 Ohms**			
410.1a	No Load Exciter Field Amps at 480 Volts Line to Line	0.68 A DC			
420.1a	Short Circuit Ratio	0.48			
421.1a	Xd Synchronous Reactance	2.596 pu			
422.1a	X2 Negative Sequence Reactance	0.203 pu			
423.1a	X0 Zero Sequence Reactance	0.036 pu			
425.1a	X'd Transient Reactance	0.141 pu			
426.1a	X''d Subtransient Reactance	0.141 pu			
--	Xq Quadrature Synchronous Reactance	1.26 sec.			
427.1a	T'd Transient Short Circuit Time Constant	0.05 sec.			
428.1a	T''d Subtransient Short Circuit Time Constant	0.013 sec.			
430.1a	T'do Transient Open Circuit Time Constant	1.63 sec.			
432.1a	Ta Short Circuit Time Constant of Armature Winding	0.016 sec.			

**Additional Prototype Mil-Std Methods
are Available on Request.**

(3) Excitation support system or PMG required to sustain short circuit currents.

* Voltage refers to wye (star) connection, unless otherwise specified.

**Not supplied as standard equipment.

***DVR®2000 voltage regulator supplied with PMG option. DVR®2000 voltage regulation 1/4%, 1 or 3 Phase sensing.

MARATHON ELECTRIC MAGNAPLUS GENERATORS

Section 3600

Page 76


Date: 1-1-00

Basic Model 431PSL6208


Test Report No. WC1903

TYPICAL DYNAMIC CHARACTERISTICS



50 HERTZ

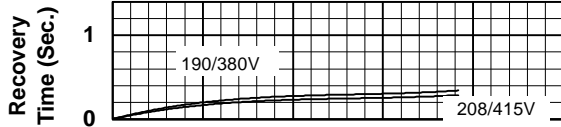


LOAD APPLICATION

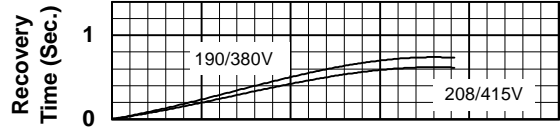



LOAD REJECTION

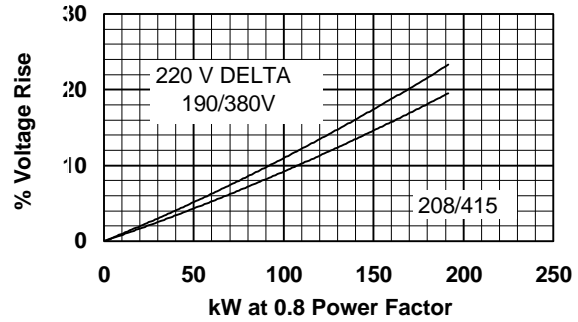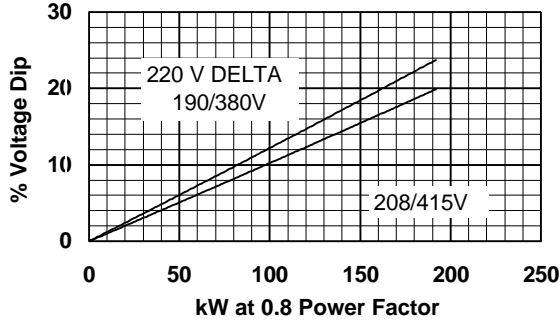

TYPICAL MOTOR STARTING CHARACTERISTICS

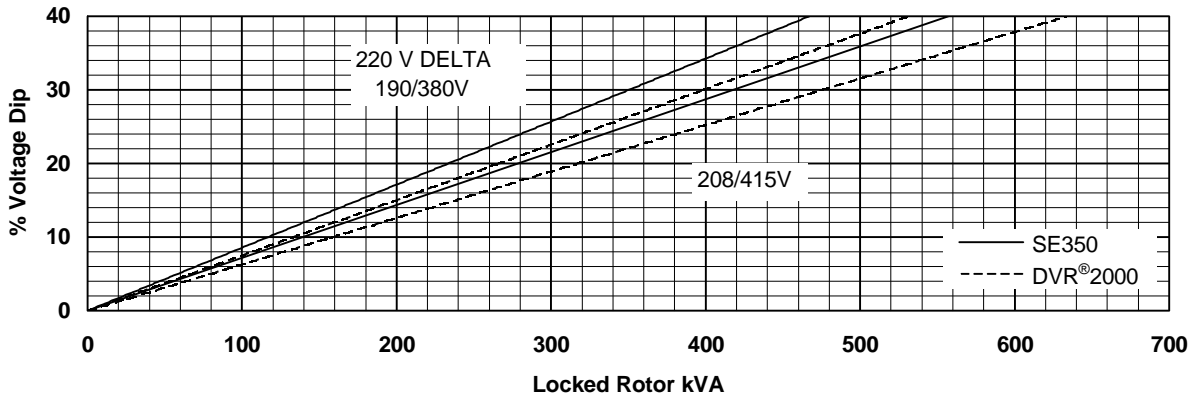

TYPICAL GENERATOR EFFICIENCY

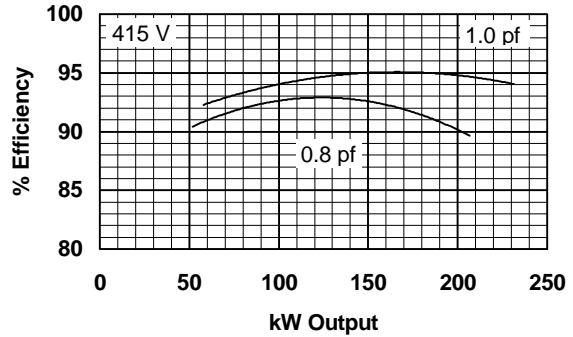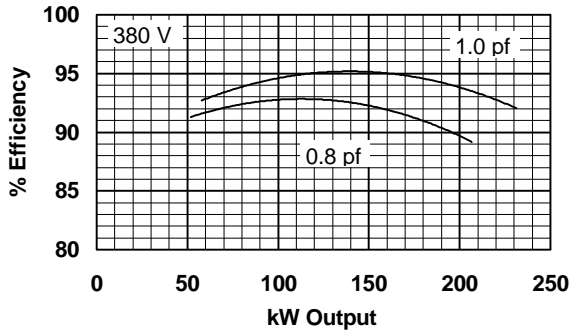

Voltage refers to wye (star) connection, unless otherwise specified.